

Product Data

Electrical Data		
	DC	AC
Supply Voltage	10 - 30 V dc	12 - 240 V dc / 20 - 240 V ac
Voltage ripple	+/- 15%	-
Reverse polarity protected	Yes	-
Short circuit protected	-	Yes
Current consumption	< 65 mA	< 70 mA
Output relay	-	1 open / 1 close, 240 V ac / 3 A
Output transistor	200 mA / 30 V dc	-


Environmental Data		
Temperature, operation	-20 to +55 °C	
Sealing class	IP 67	
Approvals	ac	
	dc	

Available Models

	Model	Supply Voltage	Output	Time Delay	Sensing Range	
Diffuse proximity	SPP 2603 T	10-30 V dc	NPN / PNP	On/Off Delay	0 - 3 m, adjustable*	
	SPP 2603			-		
	SPP 2903 T			12 - 240 V dc		Relay
	SPP 2903	20 - 240 V ac	-	-		
	SPP 2605 T	10-30 V dc	NPN / PNP	On/Off Delay		0 - 5 m, adjustable*
	SPP 2605			-		
SPP 2905 T	12 - 240 V dc			Relay	On/Off Delay	
SPP 2905	20 - 240 V ac	-	-			


* Note: Measured against matt white A4 paper.

Illustration

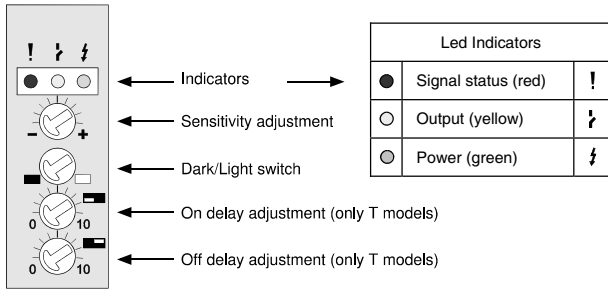


Connection

Wiring Diagrams

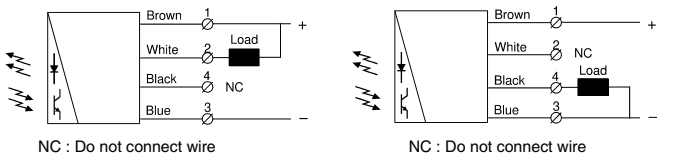

SPP 2603 / SPP 2605
Load as NPN

SPP 2603 / SPP 2605
Load as PNP



SPP 2903 / SPP 2905
Relay output

Connection Wires/Pins

	Cable	4 pin, M12 plug
Supply + / Supply ac	Brown	Pin 1 / Brown
Supply - / Supply ac	Blue	Pin 3 / Blue
Output NC	Grey	-
Output NO	Black	-
Output COM	White	-
Output PNP	Black	Pin 4 / Black
Output NPN	White	Pin 2 / White

Sensor plug

Mounting & Alignment

Mounting & Installation

- 1 Position the sensor pointing at the target object.
- 2 Align by moving sensor horizontally and vertically until the output changes when the target object is present (refer to Output Logic table).
- 3 Fasten the sensor securely using the enclosed mounting bracket and hardware. Avoid acute angles on cable close to sensor.

Adjustments

Output Mode Selection

The output mode can be selected via an integral light/dark switch. Refer to Output Logic table for output mode reference.

Light Operated (N.O.)	Enables the output to be active when there is an object present.	Turn switch to full clockwise position
Dark Operated (N.C.)	Enables the output to be inactive when there is an object present.	Turn switch to full counter clockwise position

Output Logic

Detection	Output mode	Relay Output	Transistor Output	Output indicator
Object present	Dark operated (N.C.)		Open	Off
	Light operated (N.O.)		Closed	On
Object absent	Light operated (N.O.)		Open	Off
	Dark operated (N.C.)		Closed	On

Sensitivity Adjustment

Proceed with the following steps:

- 1 Select target object with smallest dimensions and most translucent surface. Place in correct position to the SPP.
- 2 Increase sensitivity slowly from minimum (full counter clockwise) until the yellow output indicator changes. Increase a little further until the red Insufficient Signal indicator is off.
- 3 Remove target object. If output changes, the sensitivity is adjusted correctly. If the output does not change then proceed to step 4.
- 4 Place target object in correct position. Decrease the sensitivity by turning the gain potentiometer counter clockwise until the red Insufficient Signal indicator is on.
- 5 Remove target object. If the output changes the sensitivity is adjusted to suit the target and target surroundings but the adjustment is very delicate and not advisable.
- 6 If the output does not change the target object is placed too close to surrounding objects. Attempt to change position or to angle the sensor in relation to the surrounding objects. Then repeat procedure from step 1.

Time Delay Adjustment T models

The on delay enables output signal to only activate if an object in the detection area is present for the adjusted time period. (In Light operated mode)

The off delay enables output signal to remain activated for the adjusted time period.

The time delay is adjustable between 0 - 10 sec.

On delay	Increase or decrease on delay by turning potentiometer clockwise or counter clockwise respectively.
Off delay	Increase or decrease off delay by turning potentiometer clockwise or counter clockwise respectively.



Warning

This product is not a safety system and must not be used as such. It is not designed for personnel safety applications, and must not be used as a stand alone personnel safety system.