


## COMPLIMENTARY PRODUCTS

### Optical Frame Sensor Series

OAS

- 50 mm to 250 mm frame width
- Aluminium housing
- Plug connection
- Infrared light source
- Sensitivity adjustment via potentiometer
- Pulse stretching adjustment via potentiometer
- Dynamic or static detection principle
- Output indicator
- High tolerance to hostile environments
- 24 V dc supply voltage
- 3 wire, PNP output
- Fast response time
- High resolution from 0,5 mm

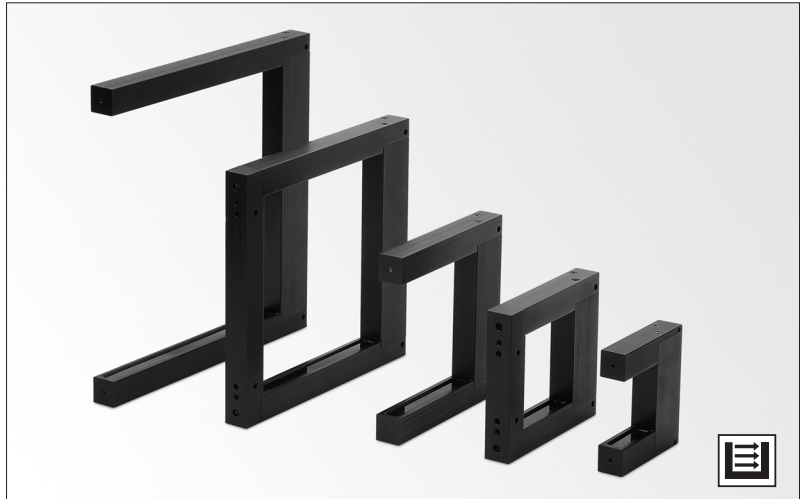

Please ask for your free literature or visit our website  
[www.telcosensors.com](http://www.telcosensors.com)